




EXTENDED SPARK PLUG BGS-14L SERIES

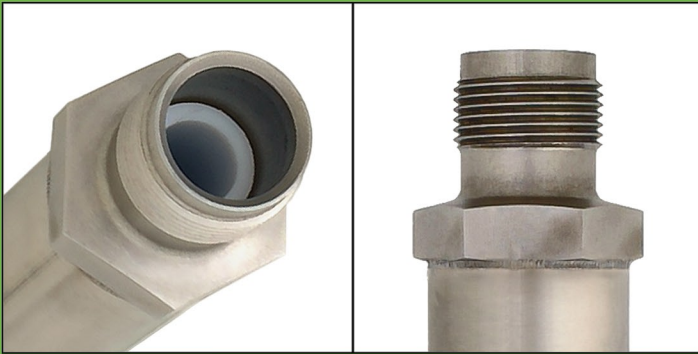

Product Features

- Corrosion-resistant laser-welded stainless steel body
- 14mm – 3/4" reach 13/16" hex spark plug
- 3/4"-20 top thread with 2" extended female terminal
- Maximum installation torque:
 - Cast iron heads: 28 ft-lb
 - Aluminum heads: 22 ft-lb

P/N	Functional Length	Fits the following engines
BGS-14L7	6.675"	Waukesha®/Arrow® VRG 220 and 330, Waukesha® F11 (G, GSI, GSID), CAT® G3304, G3306 and G343 with long reach heads
BGS-14L11	11"	CAT® G3400 engines
BGS-14L13	12.75"	Cummins® KTA 19, and 855 with standard heads, GTA 19, GTA 14, GTA 28, KTA 38
BGS-14L15	14.5"	Cummins® KTA 38, and 855 with deep heads

